

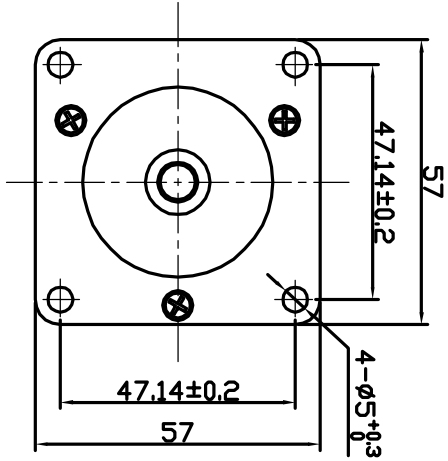
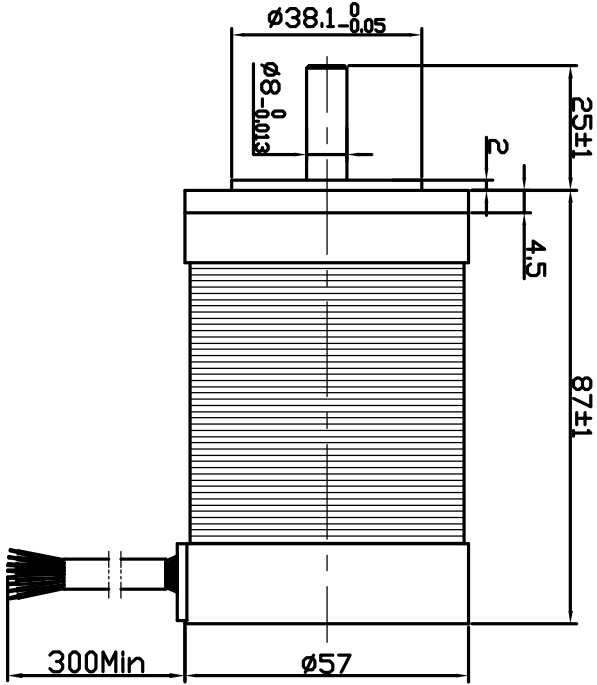


Dimension:
Unit:mm



Connection diagram:



Hall sensor cable
Note: hall sensor power supply
voltage +5 to +20VDC

ROTATION: CCW SEE FROM LEAD END

MANUFACTURER MODEL	JK57BLF03
NUMBER OF POLES	4
PHASE TO PHASE RESISTANCE	0.6 OHMS
NOMINAL VOLTAGE	36 VDC
NO LOAD SPEED	4800±10% RPM
NO LOAD CURRENT	0.7 Amps Max.
RATED TORQUE	0.33 N-m
RATED SPEED	4000±10% RPM
OUTPUT POWER	138 W
BACK EMF CONSTANT	7.5 V/KRPM
TORQUE CONSTANT	0.072 N-m/A
INSULATION CLASS	B

ELECTRICAL CONNECTION TABLE

+5V	RED	红	UL1007
HALL U	YEL	黄	26AWG
HALL V	GRE	绿	
HALL W	BLU	蓝	
GND	GND	黑	
PHASE U	YEL	黄	UL1007
PHASE V	GRE	绿	18AWG
PHASE W	BLU	蓝	

DESIGN	H/V	161128	STD.						
REV.	QTY.	No.	SIG.						
DATE									
CHECK									
PROC.			APPR.						

Title:

Specification

CLS.MAK WEIGHT SCALE

JK57BLF03

常州精控电机电器有限公司

www.jkongmotor.com

PAGE: 1/1