

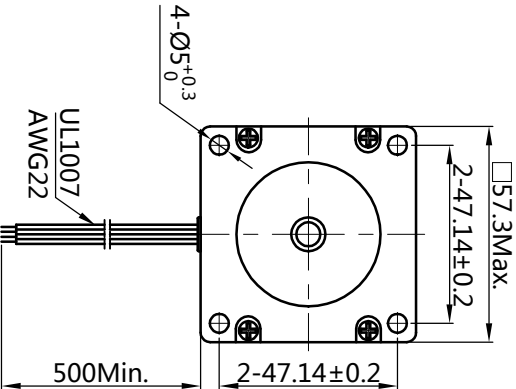


HYBRID STEPPING MOTOR SPECIFICATION

DIMENSIONS unit= mm

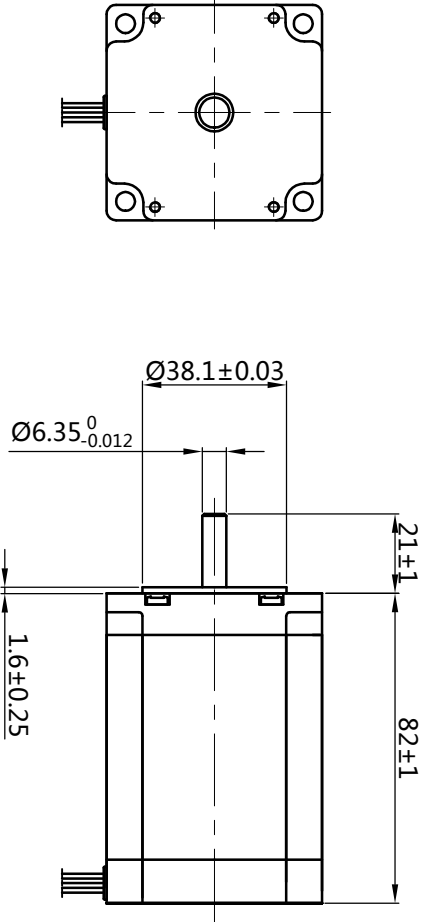


Wiring Diagram



Exciting Sequence vs.
Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CCW ↓
2	-	+	+	+	
3	-	-	+	+	
4	+	-	-	+	
					CW ↑

Clockwise view from mounting side



1. Number of Phase	2					SPECIFICATION	
2. Step Angle	1.8° deg.						
3. Rated Voltage	3.6 V						
4. Rated Current/Phase	3 A (Peak Value)						
5. Phase Resistance	1.2 Ω±10%(20℃)		REV.	REVISION RECORD			DATE
6. Phase Inductance	4 mH±20%(1KHz 1V RMS)						
7. Holding Torque	21 Kg.cm						
8. Insulation Class	B (130°) ; 80K Max.						
9. Weight	1.2 kg						
Specifications		Comment					