

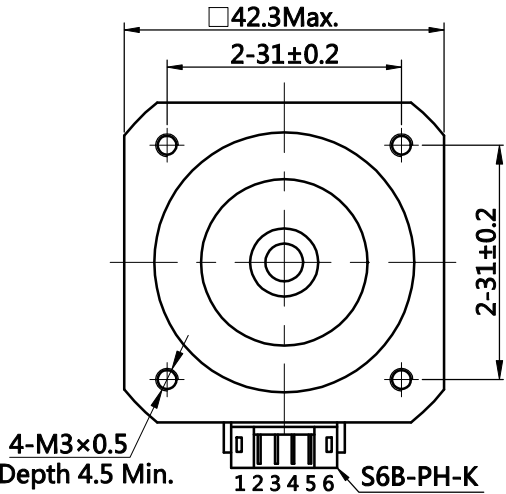
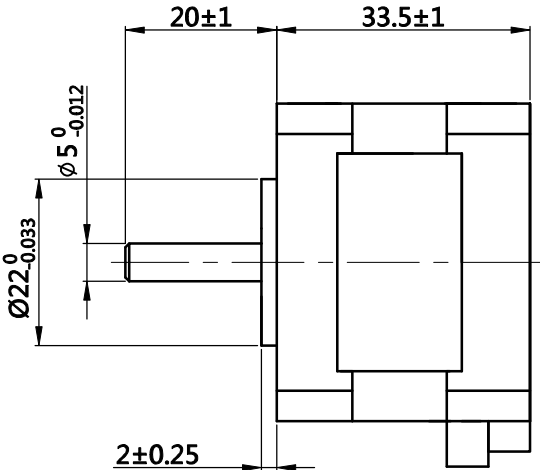


HYBRID STEPPING MOTOR SPECIFICATION

DIMENSIONS unit=mm

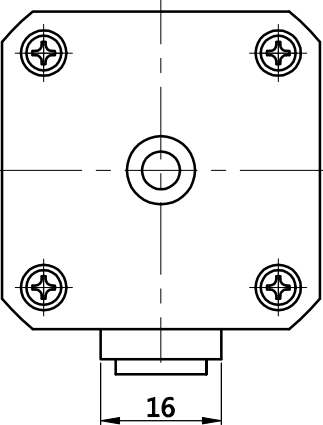


Wiring Diagram

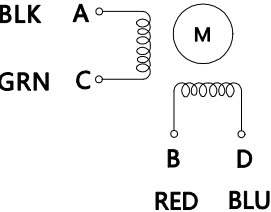

Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CCW
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

Clockwise view from mounting side



1、 Number of Phase	2					
2、 Step Angle	1.8° deg.					
3、 Rated Voltage	4.83 V					
4、 Rated Current/Phase	0.84 A (峰值 Peak Value)					
5、 Phase Resistance	5.75 Ω±10%(20℃)		REV.	REVISION RECORD		DATE
6、 Phase Inductance	9.3 mH±20%(1kHz 1V RMS)		DESIGN	成兆茹 2020.6.29	www.jkongmotor.com Specification	
7、 Holding Torque	2.8 kg.cm		STANDARD			
8、 Insulation Class	B (130°) 温升 80K Max.		TECHNOLOGY			
9、 Weight	0.22 kg		CHECK			
Specifications		Comment	APPROVE			

TITLE	STEPPING MOTOR				
DWG.NO.	JK42HS34-0844YA-08				
MATERIAL		ECN SIGN	※	SIZE	A4
REV.	A	SCALE	1:2	SHEET	1 of 1