



HYBRID STEPPING MOTOR SPECIFICATION

DIMENSIONS unit=mm

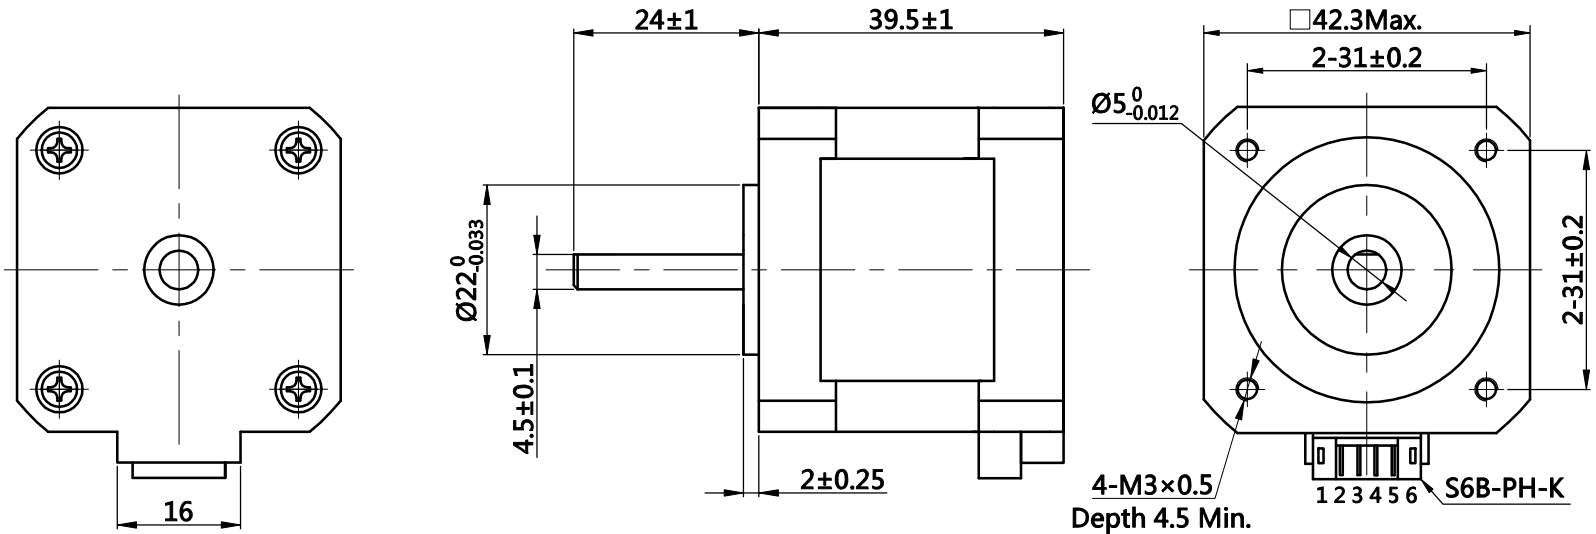


Wiring Diagram



Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CW ↓ ↑ CCW
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

Clockwise view from mounting side



1、 Number of Phase	2	REV. REVISION RECORD DATE DESIGN 成兆茹 2020.6.29 STANDARD TECHNOLOGY CHECK APPROVE	www.jkongmotor.com Specification
2、 Step Angle	1.8° deg.		
3、 Rated Voltage	3.9 V		
4、 Rated Current/Phase	1.0 A (峰值 Peak Value)		
5、 Phase Resistance	3.9 Ω±10%(20℃)		
6、 Phase Inductance	8.9 mH±20%(1kHz 1V RMS)		
7、 Holding Torque	4.0 Kg.cm		
8、 Insulation Class	B (130°) ;温升 80K Max.		
9、 Weight	0.24 kg		
Specifications		Comment	

TITLE	STEPPING MOTOR				
DWG.NO.	JK42HS40-1004A-02F				
MATERIAL		ECN SIGN	※	SIZE	A4
REV.	A	SCALE	1:2	SHEET	1 of 1