

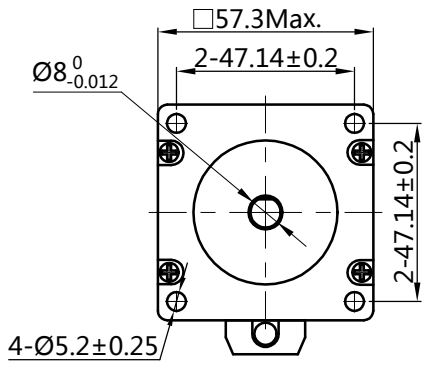
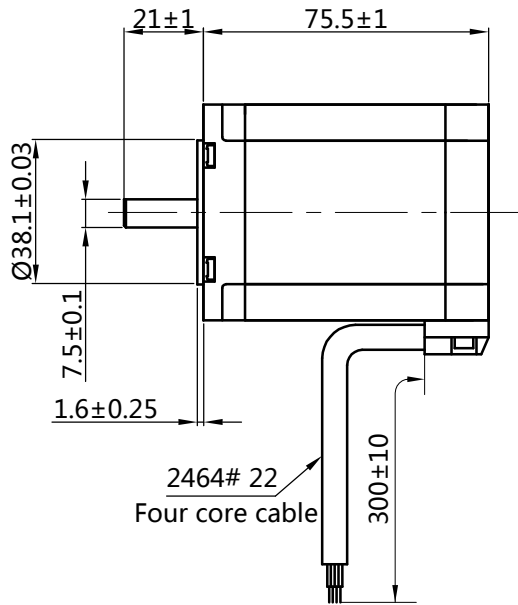


HYBRID STEPPING MOTOR SPECIFICATION

DIMENSIONS unit=mm




Wiring Diagram



Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CCW ↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

Clockwise view from mounting side



1、 Number of Phase	2	Note: Black end cap				
2、 Step Angle	1.8° deg.					
3、 Rated Voltage	2.52 V					
4、 Rated Current/Phase	4.2 A (Peak Value)					
5、 Phase Resistance	0.6 Ω±0.1(20℃)		REV.	REVISION RECORD		DATE
6、 Phase Inductance	1.8 mH±20%(1kHz 1V RMS)		DESIGN	YY 2020.06.29	www.jkongmotor.com	
7、 Holding Torque	18 Kg.cm		STANDARD		Specification	
8、 Insulation Class	B (130°) ; 80K Max.		TECHNOLOGY			
9、 Weight	1.1 kg		CHECK			
Specifications		Comment	APPROVE			

TITLE	STEPPING MOTOR					
DWG.NO.	JK57HS76-4204-11F					
MATERIAL		ECN SIGN	*	SIZE	A4	
REV.	A	SCALE	1:2	SHEET	1 of 1	